KINGSMAN FIREPLACES
Est. 1976

ZVF33, 36U/42U/52U

ZERO CLEARANCE **VENT FREE** GAS FIREPLACE

LIMITED LIFETIME WARRANTY

THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

The unit illustrated is a ZVF36U Zero Clearance Vent Free Universal Fireplace, with ZVFB3633MVN Vent Free Millivolt Natural Gas Burner System, LOGF24 Fibre Split Oak Log Set, Z36GBC Classsic Chrome Grill Kit and Z36RL Refractory Brick Liner.

2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

Model:	ZVF33 ZVFB3330MAN	ZVF33 ZVFB3330MAP	ZVF33 ZVFB3330MVN	ZVF33 ZVFB3330MVP	ZVF36U/42U ZVFB3633MAN	ZVF36U/42U ZVFB3633MAP	ZVF36U/42U ZVFB3633MVN	ZVF36U/42U ZVFB3633MVP	ZVF52U ZVFB5240MVN	ZVF52U ZVFB5240MVP
Fuel:	Natural	Propane	Natural	Propane	Natural	Propane	Natural	Propane	Natural	Propane
Gas Control:	Manual	Manual	Millivolt	Millivolt	Manual	Manual	Millivolt	Millivolt	Millivolt	Millivolt
Input Max:	30,000 BTU	30,000 BTU	30,000 BTU	30,000 BTU	32,000 BTU	33,000 BTU	32,000 BTU	33,000 BTU	40,000 BTU	37,000 BTU
Input Min:	13,000 BTU	22,000 BTU	13,000 BTU	22,000 BTU	22,000 BTU	22,000 BTU	22,000 BTU	22,000 BTU	25,000 BTU	27,000 BTU

STANDARD FEATURES

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduces below acceptable levels
- Black Canopy Hood
- All controls in Lower Access Panel (System Burner Only)
- Matchless Piezo Ignition
- Fixed Protective Door Screen or Pull Screen
- Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

OPTIONAL FEATURES

Fan Kit
Heat activated blower with variable speed control

Decorative Black Panels or Grills
Grills available in Black, Classic Series Black with Antique, Chrome, or Polish Brass accents

Surrounds Wide
Antique, Chrome, Polish Brass
Coverage:
- ZVF33 – 31 3/16" h x 36 5/8" w
- ZVF36U – 34 1/2" h x 41 1/8" w
- ZVF42U – 365/8" h x 45 1/8" w
- ZVF52U – 45" h x 53 7/8" w

Surrounds Slim Line (Louvered Units)
Antique, Chrome, Gun Metal Black, Polish Brass
Coverage:
- ZVF33 – 30 7/8" h x 33 7/8" w
- ZVF36U – 34 1/4" h x 37 1/2" w
- ZVF42U – 36 3/8" h x 43 3/8" w
- ZVF52U – 44 3/4" h x 53 1/2" w

Thermostat (Millivolt)
Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)
On/Off, Thermostat or Hi/Lo On/Off

Log Sets
Choose from our LOGF18 Gas Burner - GLVF24MAN or LOGF30 Log Set (available for ZVF52U model only) Gas Burner - GLVF24MVN

CORNER FRAMING DIMENSIONS (IN.)

	ZVF33	ZVF36U	ZVF42U	ZVF52U
A	30 3/8"	27 7/16"	30 11/16"	44 3/8"
B	42 7/8"	40 3/16"	43 3/8"	62 1/2"
C	60 5/8"	56 7/8"	61 5/16"	87 3/8"
D	33 1/8"	36 3/8"	42 3/8"	52 3/8"
E	32 1/2"	36"	42"	52"
F	13 9/16"	10 1/4"	9 1/2"	17 9/16"

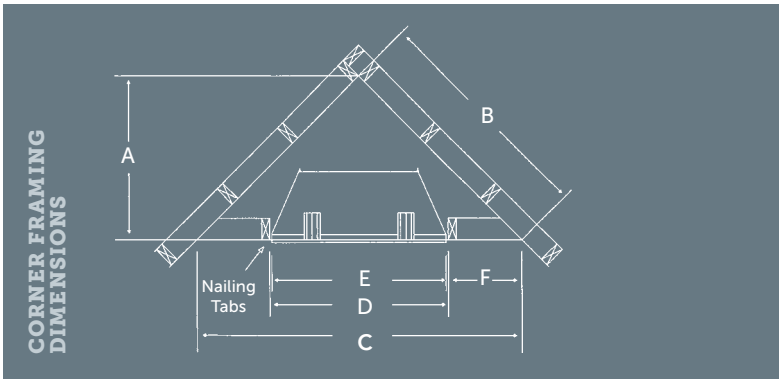

VENT-FREE FIREBOX UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models	Height Actual	Height Framing	Width Actual	Width Framing	Depth Actual	Depth Framing
ZVF33	30 1/2"	31"	32 1/2"	33 1/8"	14"	14"
ZVF36U	33 3/4"	34"	36"	36 3/8"	17"	17"
ZVF42U	36"	36 1/4"	42"	42 3/8"	17"	17"
ZVF52U	44 3/8"	44 1/2"	52"	52 3/8"	20 7/8"	21"

LOGF18 Log Set

LOGF30 Log Set (For ZVF52U only)

The ultimate in Zero Clearance Vent-Free Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.

***Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.**
Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The models ZVF33is certified for USA. Certified to: ANSI Z21.11.2a-1997, ANSI Z21.11.2-1996, ANSI Z21.11.2b-1998. The models ZVF36U, ZVF42U, ZVF52U are certified for USA. Certified to: IAS2-97 as a universal firebox.

Printed in Canada 05/14 B037